

ELECTRIC CONVECTION OVEN



Specifications

Full-size electric, forced air, single or double deck convection type oven. Standard specifications include 10.5 kw per deck, a two-speed fan with cool down and our patented wheel-within-a-wheel enhanced air flow system powered by an energy saving 1/4 hp air cooled fan motor.

Door interlock switch automatically turns the fan and heating elements off when the oven door is open. A manual rotary switch will turn the fan on when the door is open for quick cool-down. The 60 minute timer has a continuous ring alarm with manual shut-off. The indicator light glows when the heating elements are on.

The oven interior measures 29" wide (737mm) by 20" high (508mm) by 22 1/4" deep (567mm). The cooking chamber is porcelain enamel over heavy gauge steel with removable 11- position rack guides with 1 5/8" spacing (41mm) and 5 heavy-duty adjustable chrome-plated racks.

The oven exterior measures 38 1/8" wide (968mm) by 38" deep without handles (963mm) and 41 15/16" deep with handles (1065mm) by 26 7/8" (683mm) high. Front, top, sides and trim are constructed with stainless steel. Single oven legs are 31 3/8" tall (797mm) with casters and 27 5/8" (702mm) with adjustable bullet feet and finished with Durable Black Powder Coating.

Dual doors are 60/40 with double-pane thermal glass, independent operation, stainless steel seals and double mounted "Cool Touch" handles. Doors are fabricated with stainless steel inside-and-out, and fully insulated with 2" of industrial grade insulation.

Electric Convection Ovens

- Model **TSCO-E1** Single
- Model **TSCO-E2** Double

Standard Features

- Energy efficient 10.5 KW oven direct forced air heat system
- 208V or 220V-240V, 60 hz, 1 or 3 phase
- Electronic temperature control
- Double-pane thermal glass door windows
- Oven Lights
- 60-Minute continuous ring timer with manual shut-off
- 150°F (65°C) to 550°F (288°C) temperature range
- 1/4 HP air-cooled two-speed fan motor
- Cool down fan mode
- Elements-on and temperature-ready indicator light
- Porcelain enamel oven interior with cove corners
- 11-Position removable rack guide with 1 5/8" spacing
- 5 Heavy-duty, positive-stop, chrome-plated wire racks
- Stainless steel front, top & sides
- Black powder coated legs with adjustable bullet feet
- Stainless steel, 60/40 split independent operation doors, with dual mounted handles
- Stainless steel door seals
- Stacking kit for double ovens
- Front mounted, hinged control panel for easy service access
- Heavy-duty industrial grade insulation in top, sides, back & doors
- Limited 1-year parts, labor & door warranty


Options & Accessories

- Open rack stand with rack supports
- Black powder coated legs with stainless steel undershelf
- Additional oven racks
- Heavy-duty caster set, two with caster locks
- Perforated rear panel – field installation only
- International voltages, 50hz
- Stainless steel legs with or without casters

Certifications



ELECTRIC CONVECTION OVEN

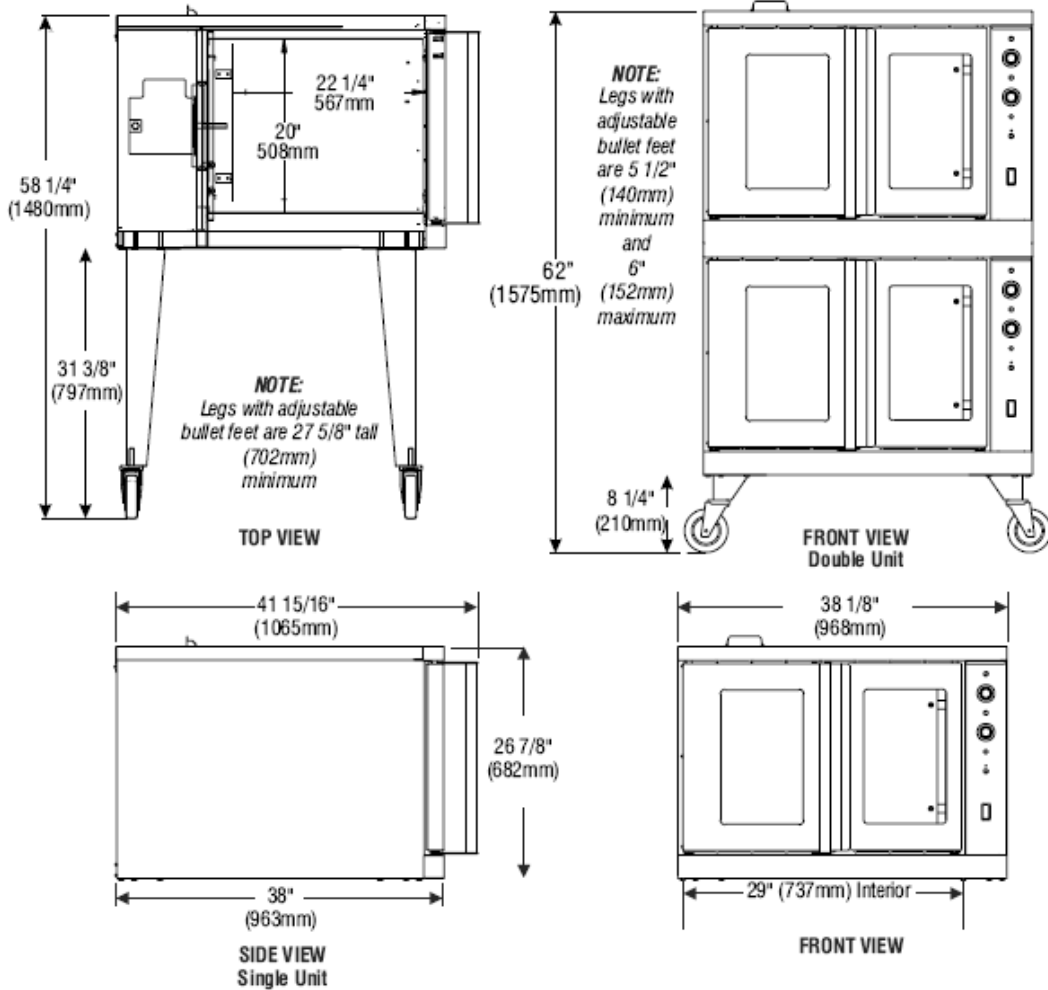

Shipping Information										
					Carton Dimensions					
Shipping Weight		Carton Size			Width		Depth		Height	
Model	Lbs	Kilos	Cubic Feet	Cubic Meters	Inches	mm	Inches	mm	Inches	mm
TSCO-E1	514	234	45.93	1.29	43	1092	48 1/4	1226	34	864

Power Supply											
					Amps			Fan-50HZ		Fan-60HZ	
Model	KW	Voltage	Phase	Line 1	Line 2	Line 3	RPM-low	RPM-high	RPM-low	RPM-high	
TSCO-E1	10.5	208	1	48	48		748	1425	850	1725	

Minimum Clearances				
	Vent Hood		Direct Venting	
	Inches	mm	Inches	mm
Right	1	25	n/a	n/a
Left	1	25	n/a	n/a
Rear	3	76	n/a	n/a

SPECIFICATIONS						
Model	OVERALL DIMENSIONS					
	Width		Depth		Height	
	In	mm	In	mm	In	mm
TSCO-E1	38 1/2"	977	38"	965	58 1/2"	1479
TSCO-E2	38 1/2"	977	38"	965	62"	1574