



A Standex Company

V-Series Restaurant Range 60" – 10 Burners

Compact Design with High Output

V-Series Ranges provides as standard many of the optional upgrades normally offered at a premium on other Range lines. The standard include a stainless steel front, ledge, backguard and shelf; aluminized sides.

Standard features include:

- 2 – 26 1/2" ovens with 10 burners
- Stainless steel front, landing ledge and backguard
- Oven is porcelainized on two contact surfaces, bottom and door liner
- 28,000 BTU/hr. lift-off burner heads for performance cooking and easy cleaning
- 12" x 12" heavy duty cast iron section grates remove easily and safely and accommodates a full range of cooking utensils for maximum versatility
- 5" stainless steel landing ledge provides a functional working area
- 10" Back shelf
- Oven has 150° - 500° holding range
- 6" adjustable legs



TSR-10-V

Design Features:

- 12" x 12" heavy duty cast iron section grates remove easily and safely. Cast-in bowl directs heat to the cooking surface.
- Grate design allows pots to slide from section to section.
- wide oven is porcelainized on two contract surfaces for easy cleaning
- Unique burner baffle distributes heat flow evenly throughout the 38,000 BTU ovens
- Oven door is removable for easy cleaning
- Stainless steel front, ledge, backguard and shelf; aluminized sides.
- Standard pans fit front to back and left to right in 26 1/2" oven
- 2 Rack guides with 1 rack

Options & Accessories


- Casters
- Additional Racks
- Gas Conversion Kits
- Casters – Set of 6
- Quick Disconnect and Flexible Gas Hose





A Standex Company

V-Series Restaurant Range 60" – 10 Burners

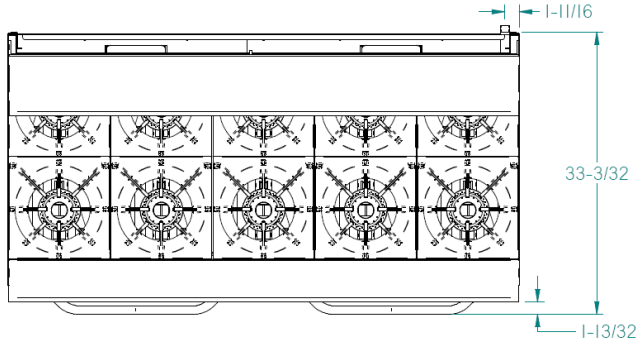

PRODUCT SPECIFICATIONS

Construction:

16 gauge construction with welded front frame. Porcelainized oven interior includes, deck and door linings. Equipped with one heavy-duty locking chrome plated rack.

Clearance: Legs or casters are required. Provide 4" from back, 14" from sides from combustible surfaces.

Gas Information:

Manifold pressure is 5.0"W.C. or natural gas or 10.0" for propane gas. Manifold size is 3/4" NPT. 3/4" pressure regulator supplied with equipment to be installed at time of connection.

Must specify type of gas and elevation if over 2000 ft. when ordering.

TSR-10-V

10 burner, (2) 26 1/2" Standard Oven, 386,000 BTU

Overall Dimensions:

TSR-10-V : 31"D x 56 5/8"H x 60"W

Shipping:

TSR-10-V : 995 lbs

Freight Class: 85

FOB: Standex Dock

